PRODRUT ®

PRODRUT ® Ltd. ul. Sobieskiego 11, 44-100 Gliwice, Poland

EQUIPMENT Type **PD62S**

1. Application

Machine

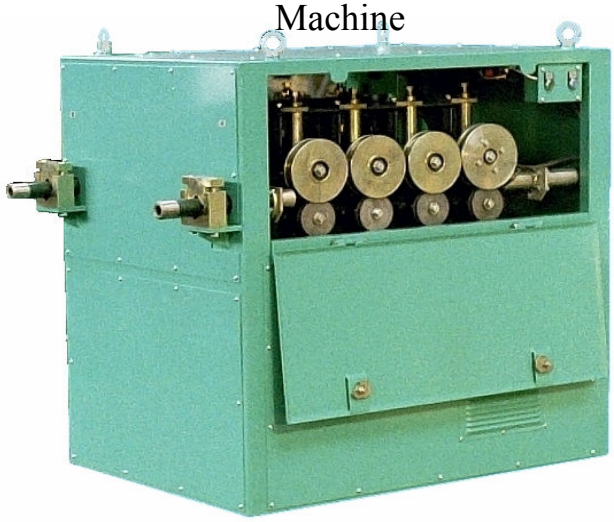

Control screen

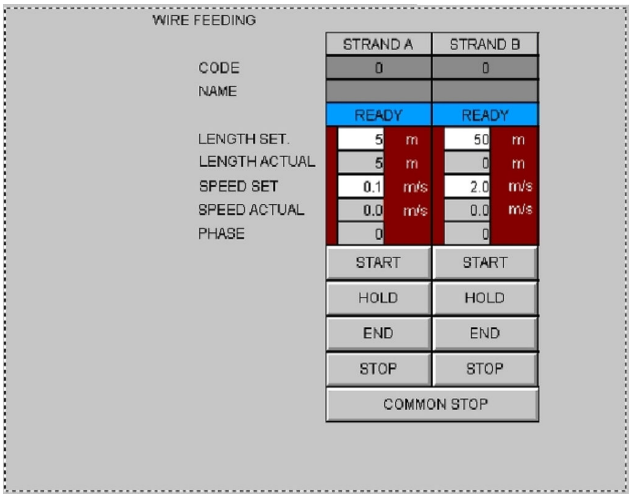

The **PD62S machine** serves to introduce cored wire into molten metal in ladle during the non-furnance treatment of steel (deoxidation, modification, desulphurization, adding of alloying elements).

This equipment was designed for the needs of large metallurgical plants.

2. Technical data

Limiting outline of feeding machine		Limiting outline of control machine	
height	1 300 mm	height	2 200 mm
width	1 000 mm	width	1 200 mm
length	1 200 mm	length	600 mm
mass	750 kg	mass	300 kg

Power installed	44 kW
Power supply	3x380 V (3x400V), 50 Hz
Electric drive	Three-phase, asynchronous motors
Velocity control	Frequency converter

3. Operation parameters

Diameter of wires injected:

cored wire (*aluminium*)	-	from 9 mm to 18 mm (*16 mm*)
Velocity of wire injection:	-	up to 300 m/min (*400 m/min*)
Velocity control:	-	stepless
Setting range of meters:	-	0001 m ÷ 9999 m, every 1 m
Number of feeding strands:	-	2
Number of powered rolls in one strand:	-	4

4. Control

Manual control is performed only from the buttons, which are located on the machine.

Full automatically control (PLC) is performed with PC monitor from control room, or from Touch Panel located on front wall of the control unit. After click the **START** button the appliance will introduce a required length of wire with predefined velocity into the ladle and will stop by itself when done.

A withdrawal of the wire from the injection system is done automatically during the cycle.